# 1933

- All In-Stock Timeworn look of handmade artisanal tile
- 2.5" x 10" gloss Walls, showers, backsplashes




Cotton White **☑** 



Natural Grey **☑** 
















Cinnamon ₫







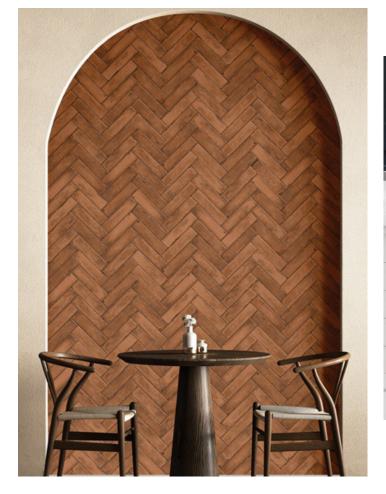





## 









<b>Technical Data</b> Properties	Results <sup>1</sup>
Surface Hardness	5 Mohs
Break Strength	≥ 150 lbf. avg.
Water Absorption	10% - 14%²

<sup>&</sup>lt;sup>1</sup> Values are offered in good faith as being accurate and typical of normal production. Due to the natural variation of raw materials and manufacturing processes, the values of the purchased product for any particular installation may vary.

<sup>&</sup>lt;sup>2</sup> Average production value.

Field Tile Nominal Size (in) <sup>1</sup>	Metric (cm)	Pcs./Sq Ft <sup>2</sup>	Thickness <sup>3</sup>	Edge
2.5x10	6x25	6.3	7.5mm	Pressed

<sup>&</sup>lt;sup>1</sup>These values may vary from lot to lot.

#### **Typical Uses**

Storied ceramic wall tile is appropriate for most residential and commercial wall and backsplash applications.

This Florida Tile product will contribute to USGBC LEED® points and the ANSI® approved NAHB® Green Building Points

#### Notes

Color, texture, and finish variations may occur due to the nature of the product.

Color reproductions in this printed piece may vary from actual tile colors.

Final selection should be made from actual tile samples.

Country of origin and other product features and characteristics are subject to change due to manufacturing efficiencies and other factors. See retailer or product packaging to verify country of origin and other product characteristics.

### Color Variation V3 Moderate Variation

<sup>&</sup>lt;sup>2</sup>These values are based on actual sizes including the grout joint.

<sup>&</sup>lt;sup>3</sup> May not apply to textured surfaces or tiles with uneven back patterns such as mesh mounted mosaics.