
BELL STREET

- Residential + commercial
- Interior wall + backsplash

TILE COMPANY



BELL STREET

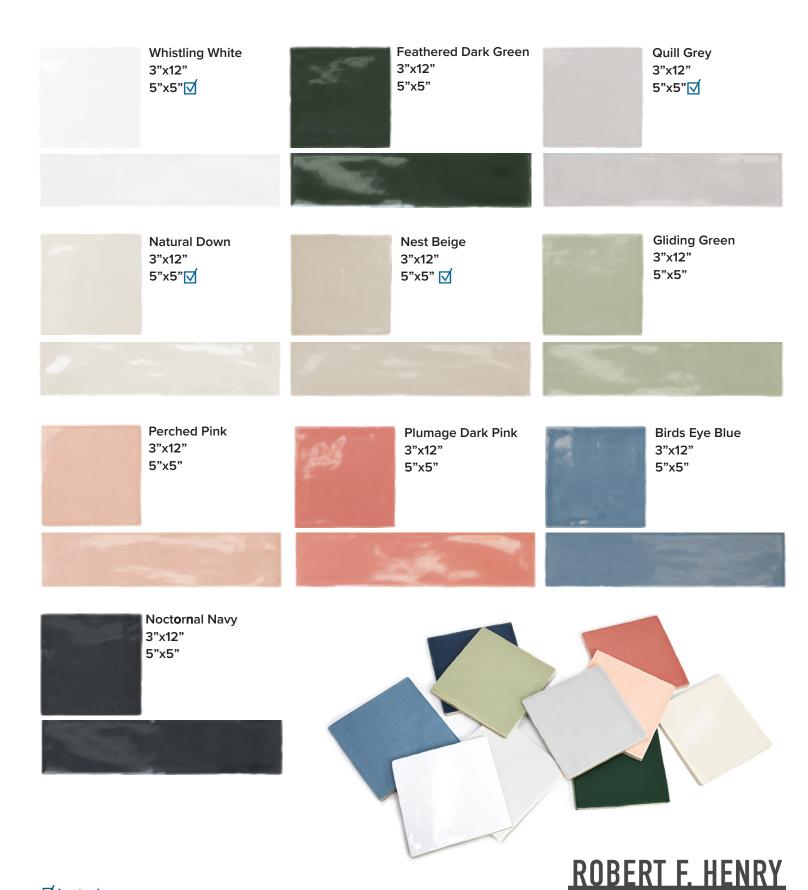













Images are for reference only; please refer to live product for an accurate color representation.

| Technical Specifications | Results ¹ |
|--------------------------|----------------------|
| Surface Hardness | 5 Mohs |
| Break Strength | ≥ 150 lbf. avg. |
| Water Absorption | ≥ 10%² |

¹ Values are offered in good faith as being accurate and typical of normal production. Due to the natural variation of raw materials and manufacturing processes, the values of the purchased product for any particular installation may vary.

² Average production value.


| Field Tile Nominal Size (in) ¹ | Metric (cm) | Pcs./Sq Ft ² | Thickness ³ | Edge |
|--|-------------|-------------------------|------------------------|---------|
| 3x12 | 7.62x30.4 | 4 | 8.5mm | Pressed |
| 5x5 | 12.7x12.7 | 5.5 | 8.5mm | Pressed |

¹These values may vary from lot to lot.

Typical Uses

Songbird ceramic wall tile is appropriate for most residential and commercial wall, countertop, and backsplash applications.

This Florida Tile product will contribute to USGBC LEED® points and the ANSI® approved NAHB® Green Building Points.



Color, texture, and finish variations may occur due to the nature of the product.

²These values are based on actual sizes including the grout joint.

³ May not apply to textured surfaces or tiles with uneven back patterns such as mesh mounted mosaics.