


ELEMENTAL

- Penny rounds, hexagon family
- In Stock
- Walls, floors, backsplashes, showers
- Residential, light commercial


1/2" Majestic Hexagon Matte 



3/4 Balance Grey Penny Matte 

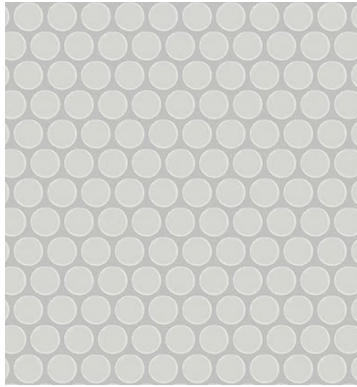


3/4 Stable Beige Penny Matte 

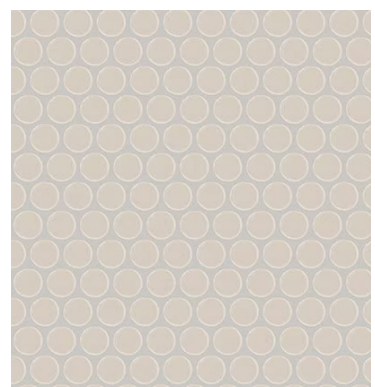


3/4 Majestic Penny Matte 



1/2" Balance Grey Hex Matte 

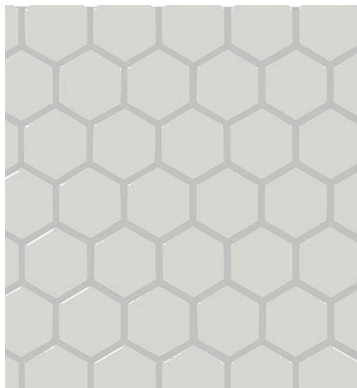


1/2" Stable Beige Hex Matte 

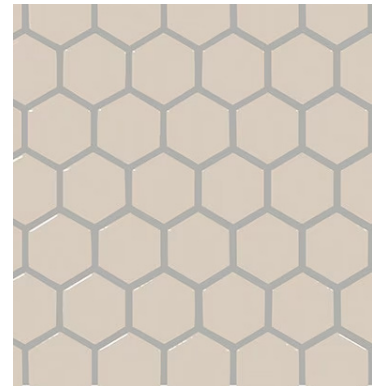

3/4 Designer White Penny Matte 



3/4 Dependable Taupe Penny Matte 

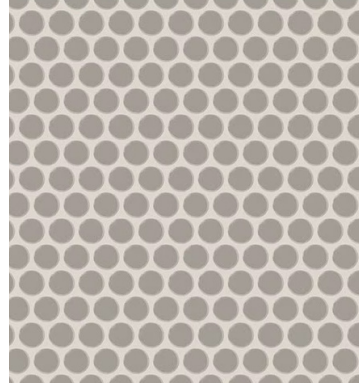

1/2" Designer White Hex Matte 



1/2" Dependable Taupe Hex Matte 



ELEMENTAL



✓ In stock

Images are for reference only; please refer to live product for an accurate color representation.

ROBERT F. HENRY
TILE COMPANY
EST. 1933

ELEMENTAL



☒ In stock

Images are for reference only; please refer to live product for an accurate color representation.

ROBERT E. HENRY
TILE COMPANY
EST. 1933

USAGE



MATERIAL



PRICING



SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	1.5" Hexagon Mosaic (Dot-mounted on 12" x 10" Sheet)	11-5/8" x 10-1/4" Sheet (28.89 cm x 26.04 cm Sheet)	1/4"	9.76	12
	Penny Round Mosaic (Mesh-mounted on 13-1/2" x 11-7/16" Sheet)	13-1/2" x 11-7/16" Sheet (34.29 cm x 29.08 cm Sheet)	1/4"	10.50	10
	2x3 Harlequin Mosaic (Dot-mounted on 12" x 13" Sheet)	12" x 13" Sheet (30.48 cm x 33.02 cm Sheet)	1/4"	8.80	10
	2x2 Mosaic (Dot-mounted on 12" x 24" Sheet)	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12
	7x3 Basket Weave Mosaic (Dot-mounted on 13-1/8" x 13-1/8" Sheet)	13-1/8" x 13-1/8" Sheet (33.34 cm x 33.34 cm Sheet)	1/4"	10.00	10
	Penny Round Mosaic (Mesh-mounted on 13-1/2" x 11-7/16" Sheet)	13-1/2" x 11-7/16" Sheet (34.29 cm x 29.08 cm Sheet)	1/4"	10.50	10
	1.5" Hexagon Mosaic (Mesh-mounted on 14" x 12" Sheet)	14" x 12" Sheet (35.56 cm x 29.21 cm Sheet)	1/4"	10	10
	2x3 Cube Mosaic (Mesh-mounted on 12" x 13" Sheet)	12" x 13" Sheet (30.48 cm x 33.02 cm Sheet)	1/4"	8.80	10

* Stocked in CS60 Matte Designer White and Matte Black.

† Stocked in CS61 Matte Designer White, Matte Black and Matte Balance.

Custom pattern and blend options available in 1.5" Hexagon, 2x3 Harlequin, 2x2 and 2x3 Cube on a made to order basis.

‡ 2x3 cube mosaic requires special installation considerations. Please refer to americanclean.com/colorstorymosaics for more information.

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level - Interior Floor	N/A	●*
Wet & Level - Interior Floor	≥ 0.42	●*
Shower Floors - Standard Center Drain (Residential or Commercial)	≥ 0.42	●*
Shower Floors - Linear Drain	≥ 0.60	●*
Exterior Floor Applications (including patio, pool decking & other wet areas with minimal footwear)	≥ 0.60	●*
Ramps & Inclines	≥ 0.65	●*
Walls/Backsplashes	N/A	●
Countertops	N/A	●†
Pool Linings	N/A	●

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanclean.com DCOF.

TRIM

	NUMBER	PIECES/ CARTON
Jolly	V2 x 12	SV212J

* Jolly suitable for wall applications only (4 pieces per card)

INSTALLATION & PRICING

Grout Joint Recommendation	Shade Variation
Mosaic V8*	LOW (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	GLOSS RESULT	MATTE RESULT
Water Absorption	C373	< 3.0%	< 3.0%
Breaking Strength	C648	> 250 lbs.	> 250 lbs.
Scratch Hardness	MOHS	4.0 - 6.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: americanclean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial
2 All Residential Areas	④ All Residential / Commercial*

* Matte finish only.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanclean.com/Factors.Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values < 0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tlusa.com.

COLOR STORY™ MOSAICS

	MUNSSELL	LRV	Illuminance OBS: F02-02 (CWF)
0014 BALANCE	10GY 7.5/0.2	51.1	
0025 ICE WHITE	7.0Y 9.2/0.2	83.9	
0034 MATTE BALANCE	1.3GY 7.5/0.3	51.1	
0049 BLACK	10.0B 2.6/0.1	5.0	
0062 MATTE STABLE	2.1Y 7.8/0.7	55.9	
0063 DEPENDABLE	0.6Y 6.3/0.5	34.2	
0065 STABLE	2.0Y 7.8/0.8	56.1	
0066 MATTE DEPENDABLE	0.4Y 6.3/0.5	33.5	
0068 RESTORE	3.7BG 7.4/1.3	48.3	
0061 MATTE DESIGNER WHITE	4.9Y 9.2/0.2	83.4	
0064 MATTE BLACK	3.3PB 2.8/0.1	5.8	
0070 SAPPHIRE SKY	7.6PB 3.2/4.4	7.0	
0082 WISDOM	5.8G 3.2/1.5	7.3	
0084 PEACOCK BLUE	1.9B 5.0/4.5	18.0	
0107 NAVY	5.0PB 2.9/1.2	5.9	