- Marble inspired Indoor, floors, walls, showers
- Made in USA Residential, light commercial



White Onyx 2"x 2" Mos Polished ☑, Matte ☑ 2"x 6" Mos Polished, Matte 3"x 24" BN Polished ☑, Matte ☑ 6"x 12" CB Polished, Matte 12"x 24" Polished ☑, Matte ☑ 24"x 48" Polished, Matte



Grey Onyx 2"x 2" Mos Polished, Matte 2"x 6" Mos Polished, Matte 3"x 24" BN Polished, Matte 6"x 12" CB Polished, Matte 12"x 24" Polished, Matte 24"x 48" Polished, Matte



Beige Onyx 2"x 2" Mos Polished, Matte 2"x 6" Mos Polished, Matte 3"x 24" BN Polished, Matte 6"x 12" CB Polished, Matte 12"x 24" Polished, Matte 24"x 48" Polished, Matte



Bianca 2"x 2" Mos Polished ☑, Matte ☑ 2"x 6" Mos Polished, Matte 3"x 24" BN Polished ☑, Matte ☑ 6"x 12" CB Polished, Matte 12"x 24" Polished ☑, Matte ☑ 24"x 48" Polished, Matte



Notte
2"x 2" Mos Polished ☑, Matte ☑
2"x 6" Mos Polished, Matte
3"x 24" BN Polished ☑, Matte ☑
6"x 12" CB Polished, Matte
12"x 24" Polished ☑, Matte ☑
24"x 48" Polished, Matte





White Onyx



Grey Onyx






Bianca



Beige Onyx



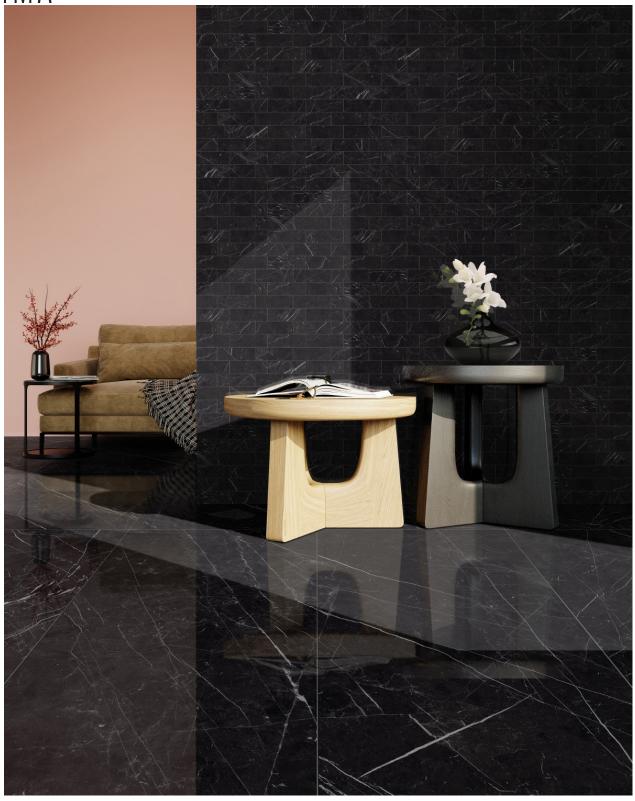

Notte



Physical – Visual Properties	ASTM TEST	Industry Standard	StonePeak
Water absorption	C373	Impervious <0.5%	≤0.1%
Thickness Dimension	C499	Range ± 0.04 Inc. Max.	≤±0.04 Inc.
Facial Dimension	C499	± 0.25 %	≤± 0.25%
Warpage average	C485	+0.40 %	< ± 0.40%
diagonal			
Warpage average edge	C485	±0.40 %	≤± 0.40%
Wedging	C502	± 0.25 %	≤± 0.25%
Bond Strength	C482	≥ 50 psi	≥ 200 psi
Breaking Strength	C648	≥250 lb.	≥ 400 lb.
Hardness (Mohs)	Scratch Test (No regulated)	Range 0 - 10	≥ 7
Visible Abrasion	C1027	No Requirement,	Class 3 -4
Resistance for Glaze tiles		Range 0 - 5	Depending by color
Frost Resistance	C1026	No sample must show alterations to surface	No evidence of Damage
Chemical Resistance	C650	No Requirement, Range E - A	Class A
Stain Resistance	C1378	No Requirement, Range E - A	Class A*
DCOF	BOT 3000	≥0.42*	≥0.42*
Aesthetic Classification	Visual Evaluation Shade & texture	No Requirement, Range VO -V4	V3

* All values given for Honed material etc.