

KLASTOS

- Slip resistant, honed
- Indoor + outdoor usage

12" x 24" ☒ 24" x 48"
2" x 2" ☒ 24" x 24"
3" x 12" BN ☒ 6" x 12"
2" x 12"



BEIGE ☒



GREIGE ☒



WHITE ☒



DARK GREY



LIGHT GREY



☒ In stock

Images are for reference only; please refer to live product for an accurate color representation.

ROBERT F. HENRY
TILE COMPANY
EST. 1933


KLASTOS

- Slip resistant, honed
- Indoor + outdoor usage

12" x 24" ☒

2" x 2" ☒

3" x 12" BN ☒

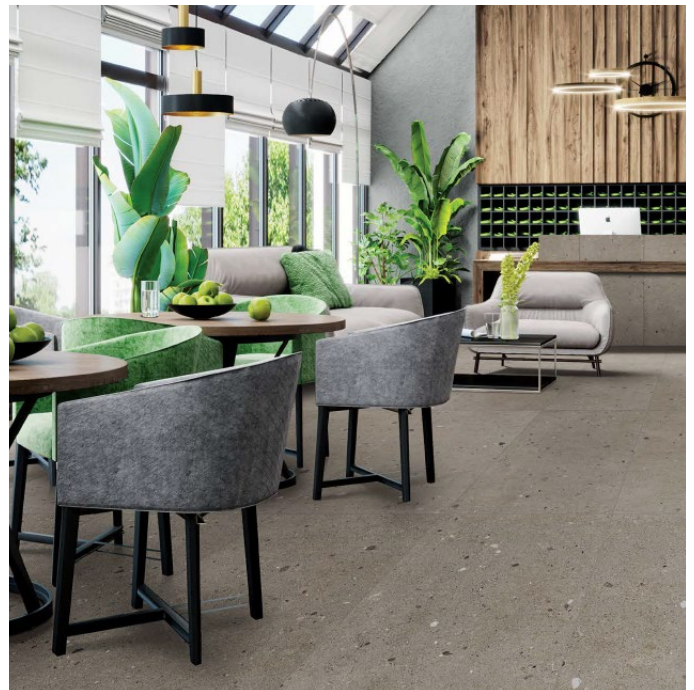

☒ In stock

Images are for reference only; please refer to live product for an accurate color representation.

ROBERT E. HENRY
TILE COMPANY
EST. 1933

Physical Properties	ASTM Test	Industry Standards	Stonepeak Results
Water Absorption	C373	Impervious < 0.5%	≤ 0.1%
Thickness Dimension	C499	Range ±0.04 Inc. Max	≤ ±0.04 Inc.
Facial Dimension	C499	± 0.25%	≤ ±0.25%
Warpage Average Diagonal	C485	±0.40%	≤ ± 0.40%
Warpage Average Edge	C485	±0.40%	≤ ±0.40%
Wedging Average	C502	± 0.25%	≤ ±0.25%
Bond Strength	C482	≥ 50 psi	≥ 200 psi
Breaking Strength	C648	≥250 lbf	≥ 400 lbf
Hardness (Mohs)	Scratch Test (No regulated)	Range 0 -10	≥7
Visible Abrasions Resistance for Glaze Tiles	C1027	No Requirement Range 0 – 5	Class 4
Frost Resistance	C1026	No samples must show alterations to surface	No Evidence Of Damage
Chemical Resistance	C650	No Requirement Range E- A	Class A
Stain Resistance	C1378	No Requirement Range E- A	Class A*
DCOF Acutest	BOT 3000	≥ 0.42*	≥ 0.42*
Aesthetic Class/Shade Rating	Visual Evaluation Shade &Texture	No Requirement Range V0 – V4	V2