

MOLO

- Outdoor + Indoor • R11, Anti-Slip • 3/8" (10mm) thick • Made in Italy
- Outdoor, patios, pool decks, walkways, terraces, walls
- Indoor, floors, walls, back splash, showers • Pattern, multi coloring

Bitta Di Porto MSE10685691



16" x 24"



16" x 16"



8" x 16"



8" x 8"

Grigio Di Scotta MSE10685711



16" x 24"




16" x 16"



8" x 16"



8" x 8"

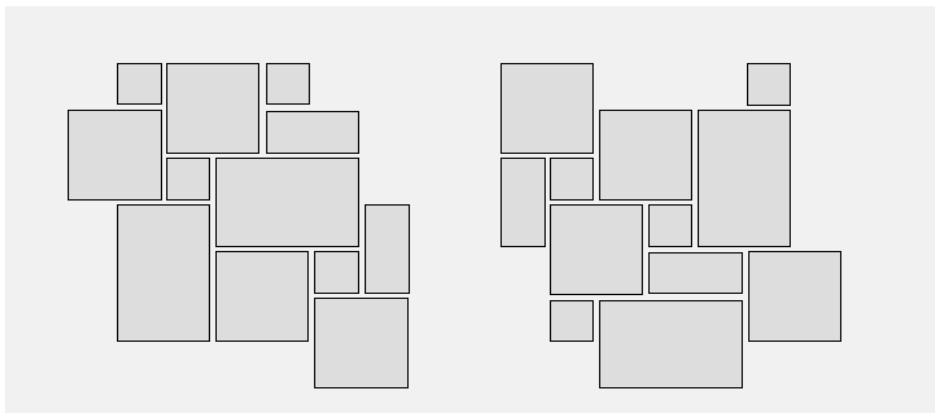

Pattern 1

Pattern 2


 In stock

Images are for reference only; please refer to live product for an accurate color representation.

ROBERT E. HENRY
TILE COMPANY
EST. 1933

MOLO

Bitta Di Porto

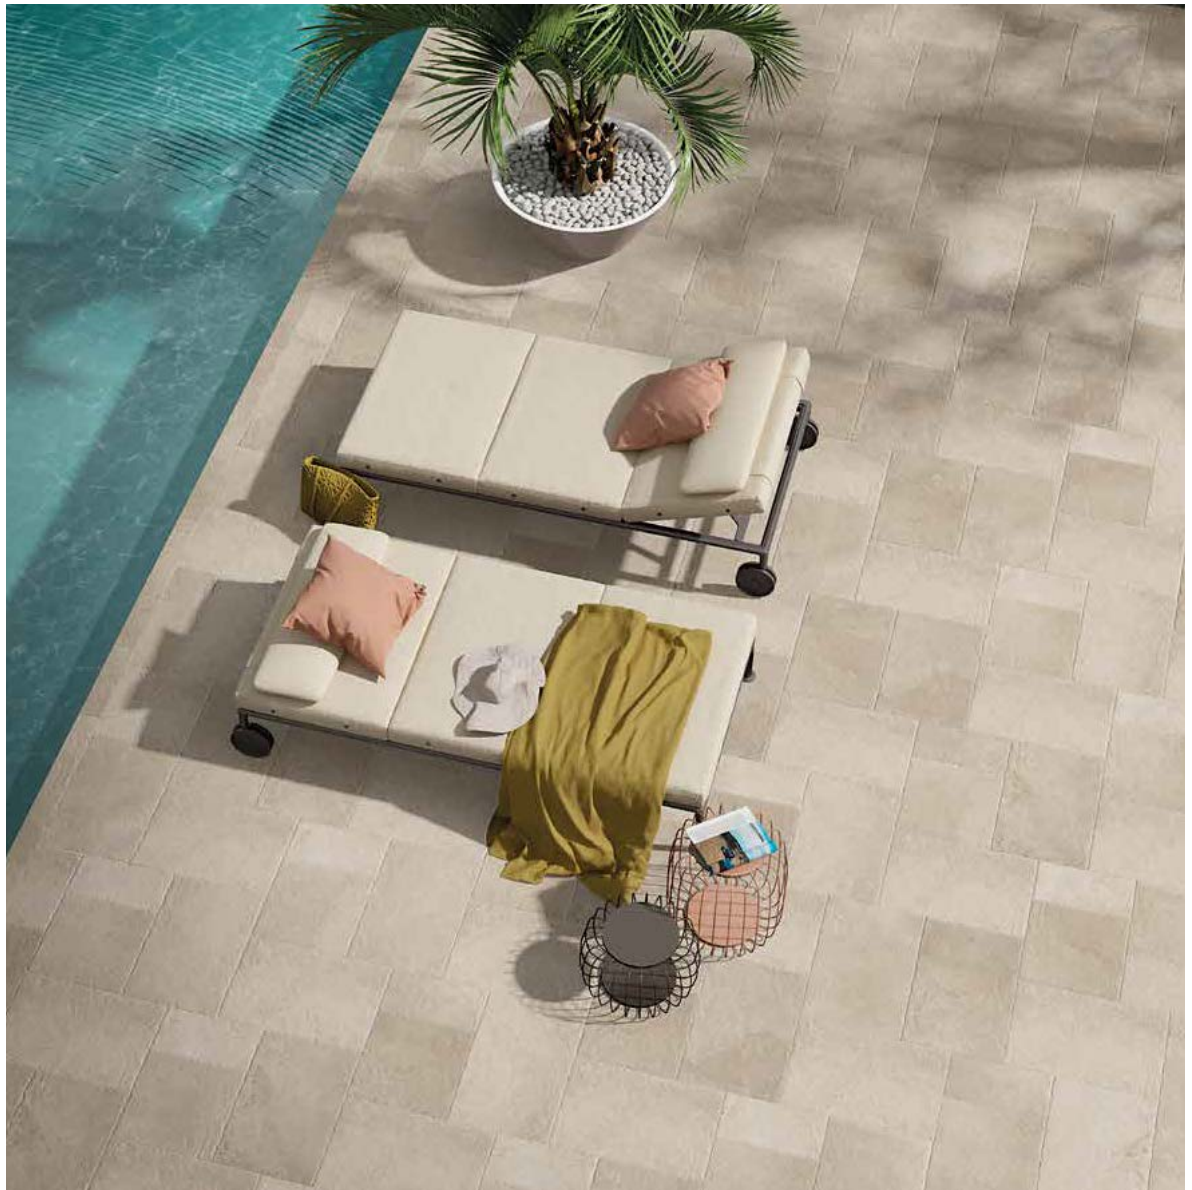

ROBERT E. HENRY
TILE COMPANY
EST. 1933

MOLO



Grigio Di Scotta



ROBERT E. HENRY
TILE COMPANY
EST. 1933

Proprietà fisico-chimiche Physical chemical properties / Propriétés physico chimiques Physisch chemische Eigenschaften / Физико химические свойства		Metodo di prova Standard of test / Norme du test Testnorm / Метод испытания	Molo Audace	
	Dimensioni / Dimensions Dimensions / Abmessungen / Размеры			
	Aspetto Superficiale / Surface appearance Аспект поверхности / Oberflächenbeschaffenheit / Вид поверхности		≥ 95%	
	Lunghezza e larghezza Length and width Längs- und Querschnitt Длина и ширина	W 10 test	± 0,5% ± 2 mm	
	Spessore Thickness Epaisseur Dicke Толщина	ISO 10545 - 2	± 5% ± 0,5 mm	
	Rettilinearità degli spigoli Straightness of edges Rectitude des arêtes Kantenegeradheit Прямолинейность кромок		± 0,3% ± 1,5 mm	
	Ortogonalità Rectangularity Orthogonalité Rechtwinkligkeit Ортogonalность		± 0,3% ± 1,5 mm	
	Piangerità Surface flatness Planité Ebenflächigkeit Плоскостность	ISO 10545-2 ASTM C 485	± 0,3% ± 1,5 mm Warpage diagonal edge ± 0,4%	
	Variazioni di tone Shade variations Variations de nuance Farbvariationen Цветовая пестротность			
	Assorbimento d'acqua Water absorption Absorption d'eau Wasseraufnahme Водопоглощение	ISO 10545 - 3	E ≤ 0,3% Bla GL	
	Resistenza al gelo Frost resistance Résistance au gel Frostbeständigkeit Морозостойкость	ISO 10545 - 12	Ingelivo Frost proof Ingeleif Froststicher Морозостойкость	
	Coefficiente di dilatazione termica lineare (50°/400°) Linear thermal expansion coefficient (50°/400°) Dilatation thermique linéaire (50°/400°) Lineare Wärmeausdehnung (50°/400°) Коэффициент линейного температурного расширения	ISO 10545 - 8	Metodo disponibile Test method available Méthode disponible Verfügbares Verfahren Имеющийся Метод	
	Resistenza agli sbalzi termici Resistance to thermal shock Résistance aux écarts de température Temperaturwechselbeständigkeit Устойчивость к температурным перепадам	ISO 10545 - 9	Resistente Resistant Résistant Widerstandsfähig Устойчивый	
	Resistenza al cavillo di piastrelle smaltate Resistance to chipping of glazed tiles Résistance à la trépanation des carreaux émaillés Hautreibeständigkeit der glasierten Fliesen Устойчивость глазурованной плитки к крошению	ISO 10545 - 11	Resistente Resistant Résistant Widerstandsfähig Устойчивый	
	Resistenza della superficie (scala MOHS) Scratch hardness (Mohs scale) Dureté de la surface (échelle MOHS) Oberflächenhärte (MOHS skala) Поверхностная прочность по шкале Мооса	EN 101	MOHS > 6	
	Resistenza alla abrasione della superficie di piastrelle smaltate Resistance to surface abrasion of glazed tiles Résistance à l'abrasion de la surface des carreaux émaillés Widerstand gegen Abrieb der Oberfläche der glasierten Fliesen Устойчивость глазурованной плитки к поверхностному истиранию	ISO 10545 - 7	Classe Class Classe Gruppe Класс	4 4 4 4 4
	Resistenza ai prodotti chimici di uso domestico Resistance to household chemicals Résistance aux produits chimiques ménagers Widerstand gegen Haushaltsreineiger Устойчивость к бытовым химикатам	ISO 10545 - 13	Classe Class Classe Gruppe Класс	A A A A A
	Resistenza agli acidi e alle basi a bassa concentrazione Resistance to low concentrations of acids and bases Résistance aux acides et aux bases à faible concentration Widerstand gegen schwach konzentrierten Säuren und Laugen Устойчивость к разбавленным кислотам и щелочам		Classe Class Classe Gruppe Класс	LA-HA LA-HA LA-HA LA-HA LA-HA
	Resistenza alle macchie di piastrelle smaltate Resistance to stains of glazed tiles Résistance aux taches des carreaux émaillés Widerstand gegen Fleckenbildner der glasierten Fliesen Устойчивость глазурованной плитки к образованию пятен	ISO 10545 - 14	Classe Class Classe Gruppe Класс	5 5 5 5 5
	Resistenza alla flessione Bending strength Résistance à la flexion Biegezugfestigkeit Прочность на изгиб	Modulo di rottura - Modulus of rupture Module de rupture - Bruchmodul - Модуль прочности Carico di rottura - Breaking of rupture Charge de rupture - Bruchlast - Наррузка	ISO 10545 - 4	R ≥ 35 N/mm ² S ≥ 1300 N
	Caratteristiche antisdruccolo / Coefficiente d'attrito statico Anti-slip properties / Static coefficient of friction Caractéristiques antiderapantes / Coefficient de frottement statique Rutschhemmende Eigenschaft / Statischer Reibungskoeffizient Свойства антискольжения / Коэффициент статического трения	DIN 51130	R10	R11
		DIN 51097	Classe B Class B Classe B Gruppe B Класс B	Classe C Class C Classe C Gruppe C Класс C
		B.C.R.A. REP. CEC. 6/B1	0,40 ≤ μ ≤ 0,74	
		DCOF	μ ≥ 0,42	