

MONTAGE

- Natural stone inspired porcelain
- Natural finish
- Walls, floors
- Backsplash, showers
- Residential, commercial

WHITE

- ☑ 3"x 12" BN
- ☑ 2"x 5" Chevron
- ☑ 15"x 30"




LIGHT GRAY

- ☑ 3"x 12" BN
- ☑ 2"x 5" Chevron
- ☑ 15"x 30"



GREIGE

- ☑ 3"x 12" BN
- ☑ 2"x 5" Chevron
- ☑ 15"x 30"

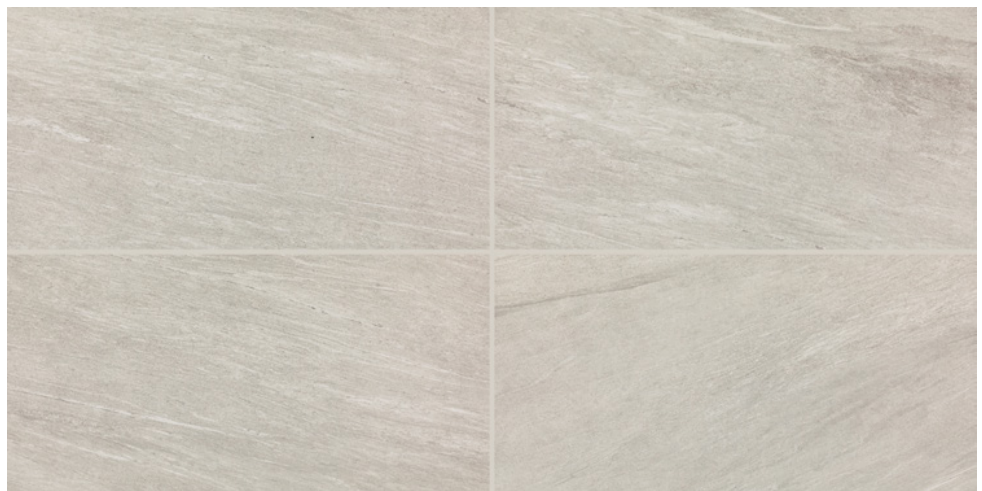

Images are for reference only; please refer to live product for an accurate color representation.

MONTAGE


MEDIUM GRAY

- ☑ 3"x 12" BN
- ☑ 2"x 5" Chevron
- ☑ 15"x 30"



CHARCOAL

- ☑ 3"x 12" BN
- ☑ 2"x 5" Chevron
- ☑ 15"x 30"

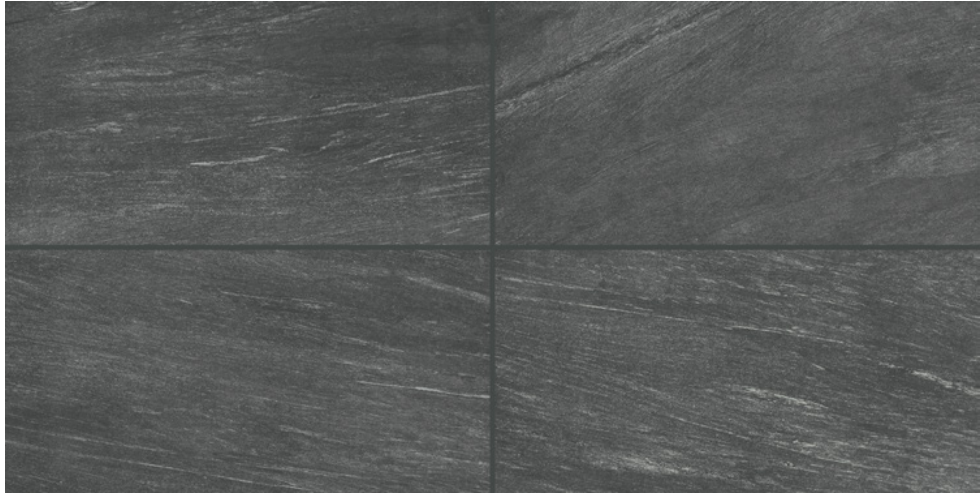

Images are for reference only; please refer to live product for an accurate color representation.

MONTAGE



Images are for reference only; please refer to live product for an accurate color representation.

MONTAGE



Images are for reference only; please refer to live product for an accurate color representation.

ROBERT E. HENRY
TILE COMPANY
EST. 1933

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	15 x 30 Floor Tile	14-15/16" x 30-1/8" (38.00 cm x 76.50 cm)	5/16"	15.65	5
	2 x 5 Chevron Mosaic (Mesh-mounted)	7-7/16" x 14-7/16" Sheet (18.92 cm x 36.67 cm Sheet)	5/16"	5.63	10

INSTALLATION & PRICING

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.) Mosaic: 1/8"	 MEDIUM (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	MOSAIC RESULT
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	> 275 lbs.	> 275 lbs.
Scratch Hardness	MOHS	8.0	8.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: americandean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance		
1	Residential Bathrooms	3 All Residential / Light Commercial
2	All Residential Areas	4 All Residential / Commercial

FEATURES



POST-CONSUMER
RECYCLED MATERIALS



PRE-CONSUMER
RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEAL IMAGING®



CERTIFIED
PO RCELAIN
TILE

ZEROTOX
Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications.
For more information visit americandean.com.

TRIM

		NUMBER	PIECES/ CARTON
	Bullnose	3 x 15	P439B 20

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level - Interior Floor	N/A	●
Wet & Level - Interior Floor	≥ 0.42	●
Shower Floors (Residential or Commercial)	≥ 0.42	●*
Shower Floors - Linear Drain	≥ 0.60	●*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	●
Ramps & Inclines	≥ 0.65	●
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●*

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americandean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

*Mosaic tile only.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americandean.com/Factors.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americandean.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.