

PLACE

- Slate inspired porcelain
- Natural finish
- Walls, floors
- Backsplash, showers
- Residential, commercial

ALMOND

- ☑ 3"x 24" BN
- ☑ 2"x 2" Mos
- ☑ 12"x 24"



AMBER

- ☑ 3"x 24" BN
- ☑ 2"x 2" Mos
- ☑ 12"x 24"



RUST

- ☑ 3"x 24" BN
- ☑ 2"x 2" Mos
- ☑ 12"x 24"



SHALE

- ☑ 3"x 24" BN
- ☑ 2"x 2" Mos
- ☑ 12"x 24"



☑ In-Stock

Images are for reference only; please refer to live product for an accurate color representation.

ROBERT F. HENRY
TILE COMPANY
EST. 1933

PLACE



Images are for reference only; please refer to live product for an accurate color representation.

ROBERT E. HENRY
TILE COMPANY
EST. 1933


PLACE



Images are for reference only; please refer to live product for an accurate color representation.

ROBERT E. HENRY
TILE COMPANY
EST. 1933

PLACE

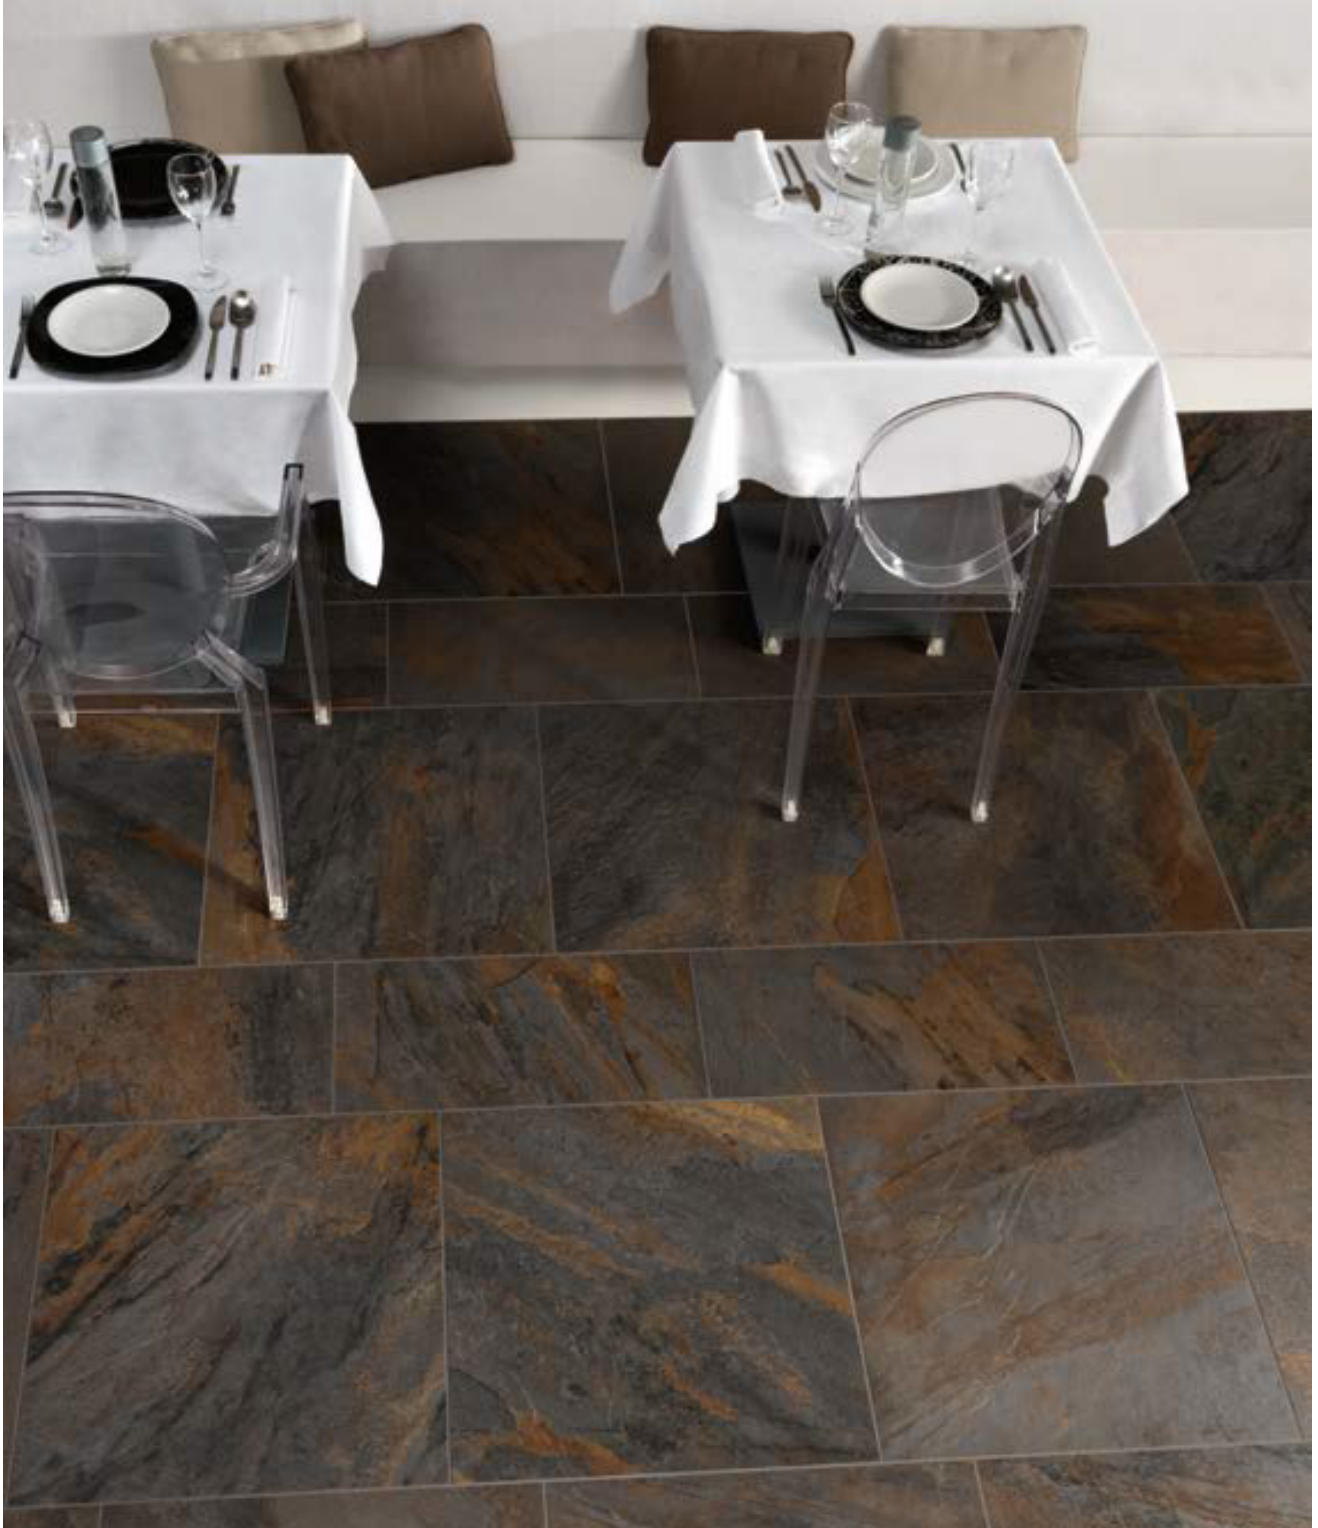

Images are for reference only; please refer to live product for an accurate color representation.

PLACE














Images are for reference only; please refer to live product for an accurate color representation.



TILE PERFORMANCE DATA

COLORED-BODY PORCELAIN TILES - RECTIFIED

Classification in accordance with ANSI A137.1: 2012 (P1 class).

TECHNICAL FEATURE	ASTM	VALUE REQUIRED ANSI A 137.1-2012	CAESAR AVERAGE VALUE
 Facial dimension	ASTM C-499	$\pm 0,25\%$ or $\pm 0,03$ in	In accordance to ANSI A 137.1-2012
 Wedging	ASTM C-502	$\pm 0,25\%$ or $\pm 0,03$ in	
 Warpage diagonal	ASTM C-485	$\pm 0,4\%$ or $\pm 0,07$ in	
 Warpage edge	ASTM C-485	$\pm 0,4\%$ or $\pm 0,05$ in	
 Thickness	ASTM C-499	RANGE: 0,040 inch max (1 mm)	In accordance to ANSI A 137.1-2012
 Water absorption	ASTM C-373	$\leq 0,5\%$	Passed "impervious tiles" Class P1
 Breaking strength	ASTM C-648	≥ 250 lbs (≥ 1113 N)	≥ 400 lbs
 Freeze thaw	ASTM C-1026	No damages	In accordance
 Chemical resistance	ASTM C-660	As reported	Unaffected
 MOHS hardness			6
 Dynamic Coefficient of Friction		0,42	In accordance

Average values referred to the last two years of production and related to the matte finish of the product.
Values relate to the matte finish of the product and to tests carried out by certified external laboratories, whose results are available upon request.
Be sure to use the same caliber tiles. Color reproductions may vary from actual products.
* Due to the intrinsic nature of porcelain stoneware tiles, please note that the coefficient of friction may vary within the same production lot or from one production lot to the other. Caesar products can become slippery when wet. We recommend to always keep the surface dry.

ACTUAL SIZES FOR RECTIFIED MATERIAL

NOMINAL SIZE INCHES	MM	ACTUAL SIZE INCHES	MM
24"x48"	610x1220	23 ^{11/32"} x47 ^{1/8"}	596x1195
24"x24"	610x610	23 ^{11/32"} x23 ^{1/32"}	596x596
12"x24"	305x610	11 ^{11/32"} x23 ^{1/32"}	297x596
8"x24"	152x610	5 ^{15/32"} x23 ^{1/32"}	145x596
8"x40"	203x1016	7 ^{11/32"} x39 ^{1/8"}	196x995

ACTUAL SIZES FOR RECTIFIED MATERIAL

NOMINAL SIZE INCHES	MM	ACTUAL SIZE INCHES	MM
24"x24"	610x610	23 ^{11/32"} x23 ^{1/32"}	598x598

ACTUAL SIZES FOR RECTIFIED MATERIAL

NOMINAL SIZE INCHES	MM	ACTUAL SIZE INCHES	MM
12"x24"	305x610	11 ^{11/32"} x23 ^{1/32"}	300x603
8"x40"	203x1016	7 ^{11/32"} x39 ^{1/8"}	200x1000

*For more detailed information about the different actual sizes for non-rectified material, please contact Caesar Ceramics USA.