

BALI RED

- Outdoor + Indoor • R11, Anti-Slip • 3/8" (10mm) thick • Made in Italy
- Outdoor, patios, pool decks, walkways, terraces, walls
- Indoor, floors, walls, back splash, showers • Pattern, multi coloring



Bali Red MSE1078573 



16" x 24"




16" x 16"




8" x 16"



8" x 8"

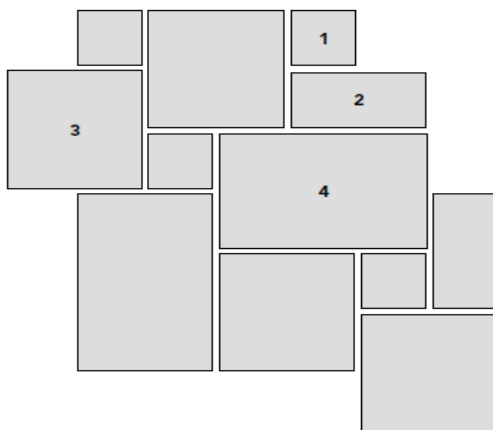

Pattern 1

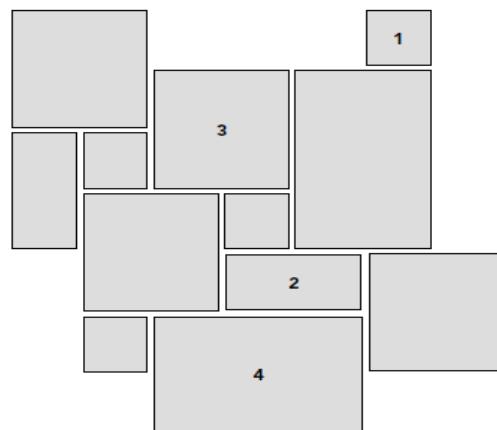

Pattern 2

 In stock

Images are for reference only; please refer to live product for an accurate color representation.



BALI RED



Images are for reference only; please refer to live product for an accurate color representation.



	Proprietà fisico-chimiche Physical chemical properties / Propriétés physico chimiques Physisch chemische Eigenschaften / Физико химические свойства		Metodo di prova Standard of test / Norme du test Testnorm / Метод испытаня	Valore medio Mean value / Valeur moyenne Mittelwert / Среднее значение	
	Dimensioni Dimensions Dimensions Abmessungen Размеры		ISO 10545 - 2	≥ 95%	
	Aspetto superficiale Surface appearance Aspect superficiel Oberflächenbeschaffenheit Вид поверхности			± 0,5% ± 2 mm	
	Lunghezza e larghezza Length and width Longueur et largeur Länge und Breite Длина и ширина	W 10 test		± 0,5% ± 2 mm	
	Spessore Thickness Epaisseur Stärke Толщина			± 5% ± 0,5 mm	
	Rettilineità degli spigoli Straightness of sides Rectitude des arrêtes Kantengeradheit Прямолинейность кромок			± 0,3% ± 1,5 mm	
	Ortogonalità Rectangularity Orthogonalité Rechtwinkligkeit Ортогональность			± 0,3% ± 1,5 mm	
	Planarità Surface flatness Planéité Ebenflächigkeit Плоскостность		ISO 10545-2	± 0,3% ± 1,5 mm	
	Variazioni di tono Shade variations Variations de nuance Tonvariationen Вариация оттенка		ASTM C 485 Warpage diagonal/edge	± 0,4%	
	Assorbimento d'acqua Water absorption Absorption d'eau Wasseraufnahme Водопоглощение		ISO 10545 - 3	V3 V4	
	Resistenza al gelo Frost resistance Résistance au gel Frostbeständigkeit Морозостойкость		ISO 10545 - 12	E ≤ 0,3 % Bla GL	
	Resistenza agli sbalzi termici Resistance to thermal shock Résistance aux écarts de température Temperaturwechselbeständigkeit Стойкость к тепловым перепадам		ISO 10545 - 9	Resistente Résistant Widerstandsfähig Устойчивый	
	Resistenza al cavillo di piastrelle smaltate Crazing resistance of glazed tiles Résistance à la tréssailure des carreaux émaillés Haarrißbeständigkeit der glasierten Fliesen Стойкость глазурованной плитки к кракелюру		ISO 10545 - 11	Resistente Résistant Widerstandsfähig Устойчивый	
	Resistenza della superficie (scala MOHS) Scratch hardness (MOHS scale) Dureté de la surface (échelle MOHS) Oberflächenhärte (MOHS skala) Поверхностная прочность по (шкале Мооса)		EN 101	MOHS > 6	
	Resistenza alla abrasione della superficie di piastrelle smaltate Resistance to surface abrasion of glazed tiles Résistance à l'abrasion de la surface des carreaux émaillés Widerstand gegen Abrieb der Oberfläche der glasierten Fliesen Стойкость глазурованной плитки к поверхностному истиранию		ISO 10545 - 7	Classe 4 Class 4 Classe 4 Gruppe 4 Класс 4	Ardenne Nero: Classe Class Classe Gruppe Класс
	Resistenza ai prodotti chimici di uso domestico Resistance to household chemicals Résistance aux produits chimiques ménagers Widerstand gegen Haushaltsreineriger Стойкость к бытовым химикатам		ISO 10545 - 13	Classe A Class A Classe A Gruppe A Класс A	
	Resistenza agli acidi e alle basi a bassa concentrazione Resistance to low concentrations of acids and bases Résistance aux acides et aux bases à faible concentration Widerstand gegen schwach konzentrierten Säuren und Laugen Стойкость к низкоконцентрированным кислотам и щелочам			Classe LA - HA Class LA - HA Classe LA - HA Gruppe LA - HA Класс LA - HA	
	Resistenza alle macchie di piastrelle smaltate Resistance to stains of glazed tiles Résistance aux taches des carreaux émaillés Widerstand gegen Fleckenbildner der glasierten Fliesen Стойкость глазурованной плитки к образованию пятен			Classe 5 Class 5 Classe 5 Gruppe 5 Класс 5	
	Resistenza alla flessione Bending strength Résistance à la flexion Biegezugfestigkeit Прочность на изгиб	Modulo di rottura - Modulus of rupture Module de rupture - Bruchmodul - Модуль жесткости Carico di rottura - Breaking of rupture Charge de rupture - Bruchkraft - нагрузка	ISO 10545 - 4	R ≥ 35 N/mm² S ≥ 1300 N	
	Caratteristiche antisdrucciolo / Coefficiente d'attrito statico Anti-slip properties / Static coefficient of friction Caractéristiques antidérapantes / Coefficient de frottement statique Rutschhemmende Eigenschaft / Statischer Reibungskoeffizient Характеристики устойчивости к скольжению / Коэффициент статического трения		DIN 51130	R10	R11
			B.C.R.A. REP. CEC. 6/81	0,40 ≤ M ≤ 0,74	
			DIN 51097	Classe B Class B Classe B Gruppe B Класс B	Classe C Class C Classe C Gruppe C Класс C
			DCOF Acu Test	M ≥ 0,42	

BALI RED

