

BALI RED

- Outdoor + Indoor • R11, Anti-Slip • 3/8" (10mm) thick • Made in Italy
- Outdoor, patios, pool decks, walkways, terraces, walls
- Indoor, floors, walls, back splash, showers • Pattern, multi coloring



Bali Red MSE1078573 



16" x 24"




16" x 16"




8" x 16"



8" x 8"

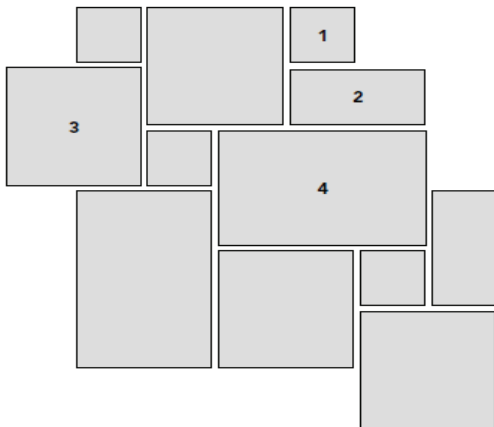

Pattern 1

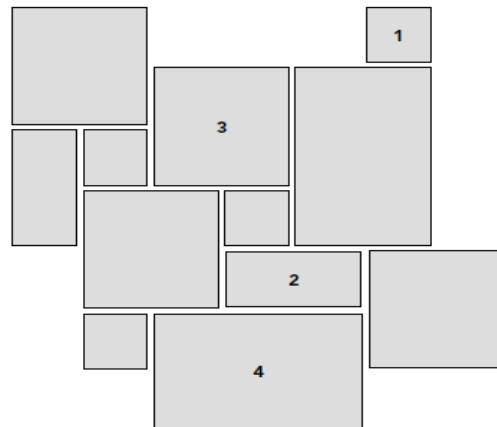

Pattern 2

 In stock

Images are for reference only; please refer to live product for an accurate color representation.

ROBERT E. HENRY
TILE COMPANY
EST. 1933

BALI RED



Images are for reference only; please refer to live product for an accurate color representation.

ROBERT E. HENRY
TILE COMPANY
EST. 1933

CARATTERISTICHE TECNICHE

	Proprietà fisico-chimiche Physical chemical properties / Propriétés physico chimiques Physisch chemische Eigenschaften / Физико химические свойства		Metodo di prova Standard of test / Norme du test Testnorm / Метод испытаня	Valore medio Mean value / Valeur moyenne Mittelwert / Среднее значение	
	Dimensioni Dimensions Dimensions Abmessungen Размеры		ISO 10545 - 2	≥ 95%	
	Aspetto superficiale Surface appearance Aspect superficiel Oberflächenbeschaffenheit Вид поверхности			± 0,5% ± 2 mm	
	Lunghezza e larghezza Length and width Longueur et largeur Länge und Breite Длина и ширина	W 10 test		± 0,5% ± 2 mm	
	Spessore Thickness Épaisseur Stärke Толщина			± 5% ± 0,5 mm	
	Rettilineità degli spigoli Straightness of sides Rectitude des arêtes Kantengeradheit Прямолинейность кромок			± 0,3% ± 1,5 mm	
	Ortogonalità Rectangularity Orthogonalité Rechtwinkligkeit Ортогональность		ISO 10545-2	± 0,3% ± 1,5 mm	
	Planarità Surface flatness Planéité Ebenflächigkeit Плоскость		ASTM C 485 Warpage diagonal/edge	± 0,4%	
	Variazioni di tono Shade variations Variations de nuance Tonvariationen Вариация оттенка			V3 V4	
	Assorbimento d'acqua Water absorption Absorption d'eau Wasseraufnahme Водопоглощение		ISO 10545 - 3	E ≤ 0,3 % Bla GL	
	Resistenza al gelo Frost resistance Résistance au gel Frostbeständigkeit Морозостойкость		ISO 10545 - 12	Resistente Resistant Résistant Widerstandsfähig Устойчивый	
	Resistenza agli sbalzi termici Resistance to thermal shock Résistance aux écarts de température Temperaturwechselbeständigkeit Стойкость к тепловым перепадам		ISO 10545 - 9	Resistente Resistant Résistant Widerstandsfähig Устойчивый	
	Resistenza al cavillo di piastrelle smaltate Crazing resistance of glazed tiles Résistance à la tréssailure des carreaux émaillés Haarißbeständigkeit der glasierten Fliesen Стойкость глазурованной плитки к кракелюру		ISO 10545 - 11	Resistente Resistant Résistant Widerstandsfähig Устойчивый	
	Resistenza della superficie (scala MOHS) Scratch hardness (MOHS scale) Dureté de la surface (échelle MOHS) Oberflächenhärte (MOHS skala) Поверхностная прочность по (шкале Мооса)		EN 101	MOHS > 6	
	Resistenza alla abrasione della superficie di piastrelle smaltate Resistance to surface abrasion of glazed tiles Résistance à l'abrasion de la surface des carreaux émaillés Widerstand gegen Abrieb der Oberfläche der glasierten Fliesen Стойкость глазурованной плитки к поверхностному истиранию		ISO 10545 - 7	Classe 4 Class 4 Classe 4 Gruppe 4 Класс 4	Ardenne Nero: Classe 4 Class 4 Classe 4 Gruppe 4 Класс 4
	Resistenza ai prodotti chimici di uso domestico Resistance to household chemicals Résistance aux produits chimiques ménagers Widerstand gegen Haushaltsreiniger Стойкость к бытовым химикатам		ISO 10545 - 13	Classe A Class A Classe A Gruppe A Класс A	
	Resistenza agli acidi e alle basi a bassa concentrazione Resistance to low concentrations of acids and bases Résistance aux acides et aux bases à faible concentration Widerstand gegen schwach konzentrierten Säuren und Laugen Стойкость к низкоконцентрированным кислотам и щелочам			Classe LA - HA Class LA - HA Classe LA - HA Gruppe LA - HA Класс LA - HA	
	Resistenza alle macchie di piastrelle smaltate Resistance to stains of glazed tiles Résistance aux taches des carreaux émaillés Widerstand gegen Fleckenbildner der glasierten Fliesen Стойкость глазурованной плитки к образованию пятен		ISO 10545 - 14	Classe 5 Class 5 Classe 5 Gruppe 5 Класс 5	
	Resistenza alla flessione Bending strength Résistance à la flexion Biegezugfestigkeit Прочность на изгиб	Modulo di rottura - Modulus of rupture Module de rupture - Bruchmodul - Модуль жесткости	ISO 10545 - 4	R ≥ 35 N/mm²	
		Carico di rottura - Breaking of rupture Charge de rupture - Bruchkraft - нагрузка		S ≥ 1300 N	
	Caratteristiche antisdrucciolo / Coefficiente d'attrito statico Anti-slip properties / Static coefficient of friction Caractéristiques antidérapantes / Coefficient de frottement statique Rutschhemmende Eigenschaft / Statischer Reibungskoeffizient Характеристики устойчивости к скольжению / Коэффициент статического трения		DIN 51130	R10	R11
			B.C.R.A. REP. CEC. 6/81	0,40 ≤ M ≤ 0,74	
			DIN 51097	Classe B Class B Classe B Gruppe B Класс B	Classe C Class C Classe C Gruppe C Класс C
			DCOF Acu Test	M ≥ 0,42	

BALI RED