
BOND

• Textile Inspired • Matte • Rectified • Walls, floors, backsplashes, showers
• Residential / Commercial use • Made in USA







2”x6.5” stretch mosaic on 9.4”x12” sheet

Silk
Leather
Jute
Wool



2”x2” mosaic on 12”x12” sheet

Silk
Leather
Jute
Wool




3”x24” Bullnose

Silk
Leather
Jute
Wool


JUTE

12”x 24”
24”x 48”
6”x 24”
3”x 24” BN
2”x 2” Mos
2”x 6.5” Mos

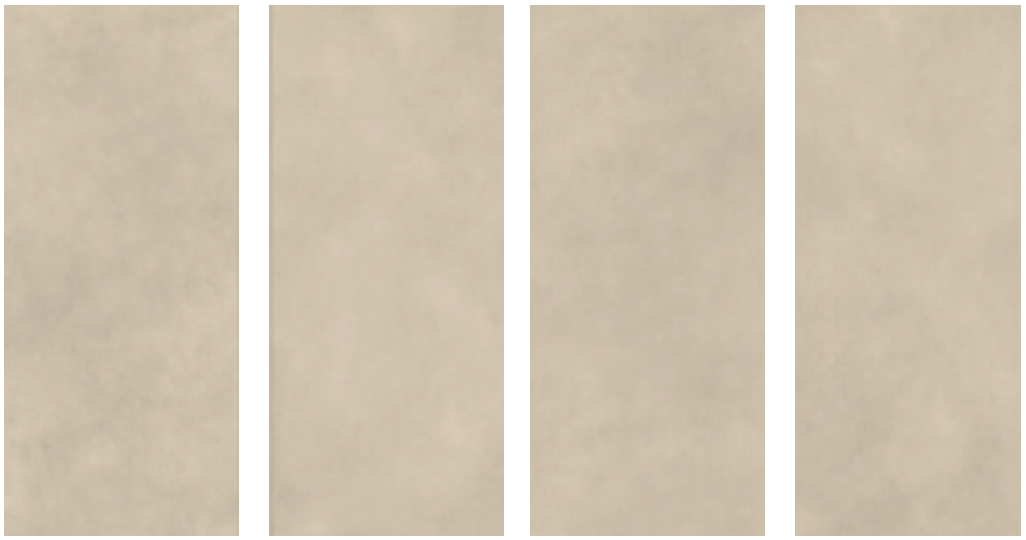

LEATHER

12”x 24”
24”x 48”
6”x 24”
3”x 24” BN
2”x 2” Mos
2”x 6.5” Mos

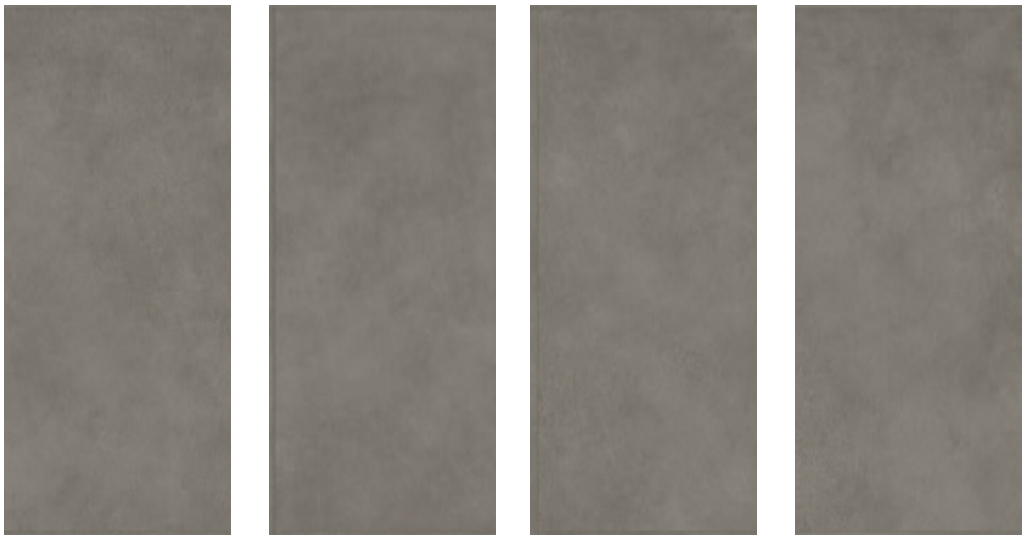

☑ In stock

Images are for reference only; please refer to live product for an accurate color representation.

ROBERT F. HENRY TILE COMPANY EST. 1933

BOND







ROBERT F. HENRY
TILE COMPANY
EST. 1933

BOND

COLOR-BODY PORCELAIN TILES - RECTIFIED

Classification in accordance with ANSI A137.1 (P1 class).

Residential · Commercial · Porcelain Stoneware · Floor · Wall · DCOF compliant · Thickness 3/8" (9mm) · Rectified Tile · NO V.O.C · Frost Proof · Low water absorption (≤0,5%) · Made in USA

	TECHNICAL FEATURE	METHOD	VALUE REQUIRED ANSI A 137.1	CAESAR AVERAGE VALUE
	Facial dimension	ASTM C-499	± 0.25% or ± 0.03 in	In accordance to ANSI A 137.1
	Wedging	ASTM C-502	± 0.25% or ± 0.03 in	
	Warpage diagonal	ASTM C-485	± 0.4% or ± 0.07 in	
	Warpage edge	ASTM C-485	± 0.4% or ± 0.05 in	
	Thickness	ASTM C-499	RANGE: 0.040 inch max (1 mm)	In accordance to ANSI A 137.1
	Water absorption	ASTM C-373	≤ 0.5%	Passed "impervious tiles" Class P1
	Breaking strength	ASTM C-648	≥ 250 lbs (≥1113 N)	≥400 lbs
	Freeze thaw	ASTM C-1026	No damages	In accordance
	Chemical resistance	ASTM C-650	As reported	Unaffected
	MOHS hardness			6
	Dynamic Coefficient of Friction	ANSI A 326.3	Declare	WET DOCF ≥0.42
			Classified	Interior Wet

ROBERT F. HENRY TILE COMPANY EST. 1933