
GRAYSTONE

• Matte • Non-Rectified • Walls, floors, backsplashes, showers
• Residential / Commercial use


WHITE
12”x 24”
3”x 24” BN
2”x 2” Mos



CLOUD
12”x 24”
3”x 24” BN
2”x 2” Mos

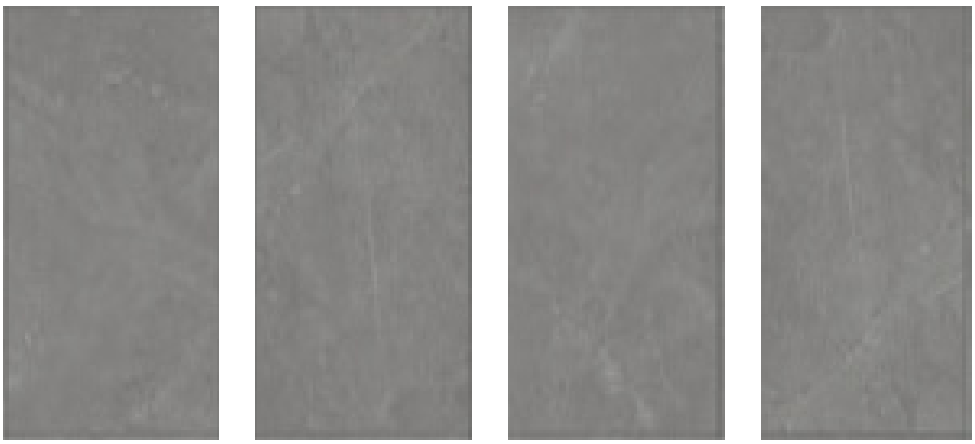

LIGHT
12”x 24”
3”x 24” BN
2”x 2” Mos

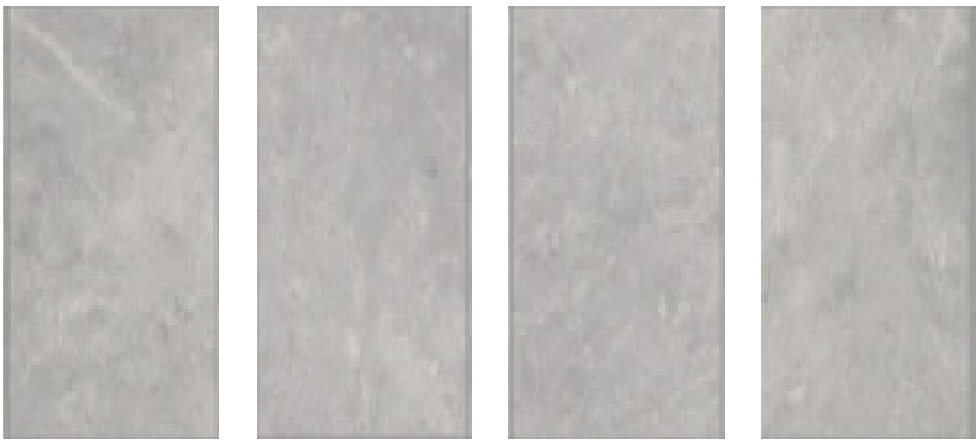

☑ In stock

Images are for reference only; please refer to live product for an accurate color representation.

ROBERT F. HENRY TILE COMPANY EST. 1933

GRAYSTONE







ROBERT F. HENRY
TILE COMPANY
EST. 1933

GLAZED - NON RECTIFIED PORCELAIN TILES

Classification in accordance with ANSI A137.1 (P1 class).

GRAYSTONE

Residential | Light Commercial | Porcelain Tile | Floor | Wall | DCOF compliant | Thickness 3/9" (8mm) | NO V.O.C | Frost Proof | Low water absorption (≤0,5%) | Made in USA

	TECHNICAL FEATURE	METHOD	VALUE REQUIRED ANSI A 137.1	CAESAR AVERAGE VALUE
	Facial dimension	ASTM C-499	± 0.5% or ± 0.08 in	In accordance to ANSI A 137.1
	Wedging	ASTM C-502	± 0.5% or ± 0.08 in	
	Warpage diagonal	ASTM C-485	± 0.5% or ± 0.07 in	
	Warpage edge	ASTM C-485	± 0.5% or ± 0.07 in	
	Thickness	ASTM C-499	RANGE: 0.040 inch max (1 mm)	In accordance to ANSI A 137.1
	Water absorption	ASTM C-373	≤ 0.5%	Passed "impervious tiles" Class P1
	Breaking strength	ASTM C-648	≥ 250 lbs (≥1113 N)	≥400 lbs
	Freeze thaw	ASTM C-1026	No damages	In accordance
	Chemical resistance	ASTM C-650	As reported	Unaffected
	MOHS hardness			6
	Dynamic Coefficient of Friction	ANSI A 326.3	Declare	WET DOCF ≥0.42
			Classified	Interior Wet

ROBERT F. HENRY TILE COMPANY EST. 1933