
# SELECT

• Natural stone inspired • Matte • Rectified • Walls, floors, backsplashes, showers
• Residential / Commercial use • Made in USA


24”x48”


12”x24”


6”x24”


2”x2” mosaic


2”x2” mosaic


3”x3.5” hexagon


3”x3.5” hexagon


2.72”x3” basket


2.72”x3” basket


3”x24” Bullnose

## SAVOY WHITE

12”x 24”
24”x 48”
24”x 24”
6”x 24” BN
2”x 2” Mos
3”x 3.5” Mos
2.72”x 3” Mos Bask






## SAVOY GREY

12”x 24”
24”x 48”
24”x 24”
6”x 24” BN
2”x 2” Mos
3”x 3.5” Mos
2.72”x 3” Mos Bask






☑ In stock

Images are for reference only; please refer to live product for an accurate color representation.

ROBERT F. HENRY TILE COMPANY EST. 1933

# SELECT






ROBERT F. HENRY
TILE COMPANY
EST. 1933

# SELECT

## COLOR-BODY PORCELAIN TILES - RECTIFIED

Classification in accordance with ANSI A137.1 (P1 class).

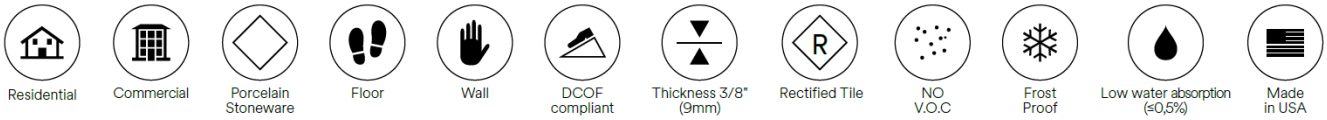


| | TECHNICAL FEATURE | METHOD | VALUE REQUIRED ANSI A 137.1 | CAESAR AVERAGE VALUE |
|---|---|---|---|---|
| | Facial dimension | ASTM C-499 | ± 0.25% or ± 0.03 in | In accordance to ANSI A 137.1 |
| | Wedging | ASTM C-502 | ± 0.25% or ± 0.03 in | |
| | Warpage diagonal | ASTM C-485 | ± 0.4% or ± 0.07 in | |
| | Warpage edge | ASTM C-485 | ± 0.4% or ± 0.05 in | |
| | Thickness | ASTM C-499 | RANGE:<br>0.040 inch max (1 mm) | In accordance to ANSI A 137.1 |
| | Water absorption | ASTM C-373 | ≤ 0.5% | Passed "impervious tiles" Class P1 |
| | Breaking strength | ASTM C-648 | ≥ 250 lbs (≥1113 N) | ≥400 lbs |
| | Freeze thaw | ASTM C-1026 | No damages | In accordance |
| | Chemical resistance | ASTM C-650 | As reported | Unaffected |
| | MOHS hardness | | | 6 |
| | Dynamic Coefficient of Friction | ANSI A 326.3 | Declare | WET DOCF ≥0.42 |
| | | | Classified | Interior Wet |

ROBERT F. HENRY TILE COMPANY EST. 1933