

TEA TIME

- Natural stone inspired • Rectified • Matte finish
- Four Colors • Walls, floors, backsplash, showers
- Residential + light commercial • Made in USA

PURE CHAMOMILE

12"x 24" 24"x 24" 3"x 24"




SPICED CHAI

12"x 24" 24"x 24" 3"x 24"



EARL GREY

12"x 24" 24"x 24" 3"x 24"

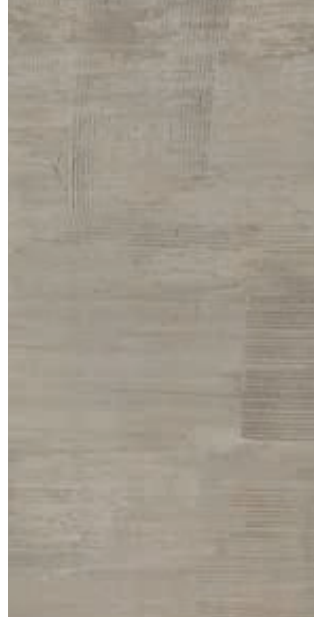

MOUNTAIN ROSE

12"x 24" 24"x 24" 3"x 24"



☒ In stock

Images are for reference only; please refer to live product for an accurate color representation.



TEA TIME

	12 x 24 Floor Tile	11-5/8" x 23-3/8" (29.56 cm x 59.44 cm)	5/16"
	24 x 24 Floor Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"

SIZES

Number			
	Bullnose	3 x 24	P43P9

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors – Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 HIGH (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	(4)	All Residential / Commercial

 In stock

Images are for reference only; please refer to live product for an accurate color representation.